

Olympia Micro™ *ClimaPlus*™




10

Year Availability

4211, 4221, 4231, 4411, 4421, 4742, 4744

HRC

High Recycled Content

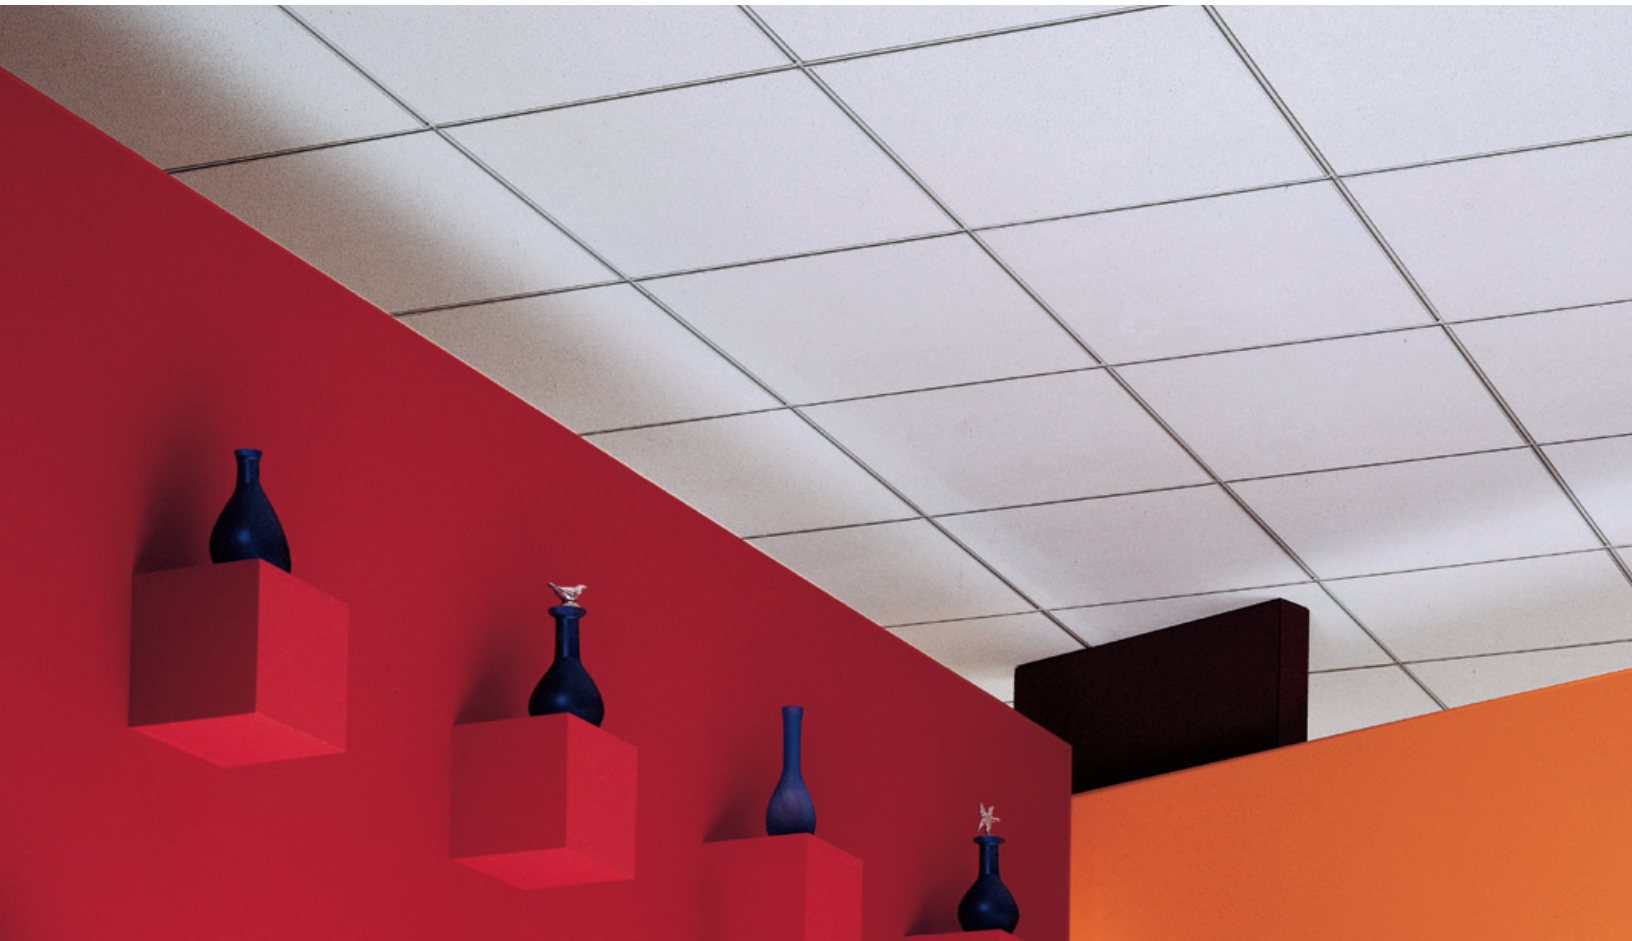

OLYMPIA MICRO Panels with *CLIMAPLUS* Superior Performance
DONN FINELINE DXF Suspension System

LEED Credits

Total Recycled Content: 51% – 60%
LEED Recycled Content Contribution: 33% – 42%
CLIMAPLUS Superior Performance for Mold and Mildew

MR				EQ		
Waste Reduction ¹	Recycled Content	Regional Materials ²	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

Features and Benefits

- Nondirectional pattern reduces installation time and waste
- Economical, fine-textured panel.
- Excellent light reflective finish (LR - .87) reduces light fixtures and energy use
- Available in Optimized Recycled Content formulations to help maximize LEED recycled content contribution
- Available with .60 NRC to assist in addressing HIPAA requirements (excludes items 4750 & 4751)
- *CLIMAPLUS*™ 30-year lifetime system warranty against visible sag, mold and mildew

Applications

- Offices
- Healthcare – HIPAA Requirements (.60 NRC)
- Classrooms
- Reception/Lobby areas
- Hotels
- Conference areas
- Retail stores

Substrate

- Water-felted mineral fiber



Fine-textured panel

To order samples, go to usg.com



White

Olympia Micro™ ClimaPlus™

To order samples/literature:

- Web: usg.com
- E-mail: samplit@usg.com
- Fax: 888.874.2348

Web Sites: usg.com


- usgdesignstudio.com
- sustainableceilings.com
- seismicceilings.com

See usg.com for the most up-to-date product information.

Technical Services: 800.USG.4YOU

30
Year System Warranty
- No visible sag
- Mold/mildew protection

	Edge	Panel Size	Class	Item No.	UL Classified				Color	Grid Options	VOC ⁸ Emissions	Anti-Mold & Mildew	Recycled Content ²				Panel Cost
					NRC	CAC Min. ³	LR ⁴						Total	PC	PI	LEED RC	
OLYMPIA MICRO ClimaPlus, unperforated	SQ	2'x2'x5/8"	Class A	4210	-	35	.87	White	A, B, C	Low		52%	-	-	-	\$\$	
		2'x4'x5/8"	Class A	4913	-	35	.87	White	A, B	Low		52%	-	-	-	\$\$	
OLYMPIA MICRO ClimaPlus Panels .50 NRC⁵	SQ	2'x2'x5/8"	Class A	4211	.50	30	.87	White	A, B, C	Low		51%	13%	39%	33%	\$\$	
		2'x4'x5/8"	Class A	4411	.50	30	.87	White	A, B	Low		51%	13%	39%	33%	\$\$	
	SLT	2'x2'x5/8"	Class A	4221	.50	35	.87	White	D	Low		51%	13%	39%	33%	\$\$	
		2'x4'x5/8"	Class A	4421	.50	35	.87	White	D	Low		51%	13%	39%	33%	\$\$	
	FLB	2'x2'x5/8"	Class A	4231	.50	35	.87	White	E, F, G, H	Low		51%	13%	39%	33%	\$\$	
		2'x4'x5/8"	Class A	4431	.50	35	.87	White	E, F, G, H	Low		51%	13%	39%	33%	\$\$	
OLYMPIA MICRO ClimaPlus Panels .60 NRC⁵	SQ	2'x2'x3/4"	Class A	4750	.60	33	.87	White	A, B, C	Low		56%	-	-	-	\$\$	
		2'x4'x3/4"	Class A	4751	.60	33	.87	White	A, B	Low		56%	-	-	-	\$\$	
	SLT	2'x2'x3/4"	Class A	4752	.60	35	.87	White	D	Low		56%	-	-	-	\$\$	
		2'x4'x3/4"	Class A	4753	.60	35	.87	White	D	Low		56%	-	-	-	\$\$	
	FLB	2'x2'x3/4"	Class A	4754	.60	35	.87	White	E, F, G, H	Low		56%	-	-	-	\$\$	
		2'x4'x3/4"	Class A	4755	.60	35	.87	White	E, F, G, H	Low		56%	-	-	-	\$\$	
OLYMPIA MICRO ClimaPlus Illusion Two/24 Panels The look of 2'x2' panels	SLT ⁴	2'x4'x3/4"	Class A	4742	.50	35	.87	White	D	Low		52%	-	-	-	\$\$	
		2'x4'x3/4"	Class A	4744	.50	35	.87	White	I, J	Low		52%	-	-	-	\$\$	

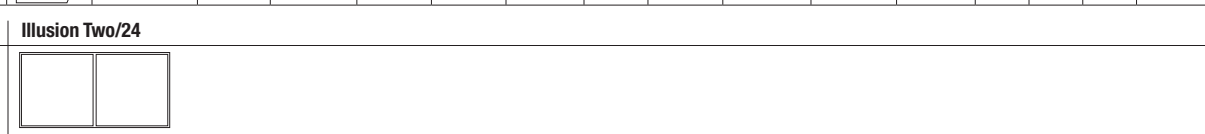

Patterns

Legend

- Low Emissions (VOC Class)**
Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.
- CLIMAPlus Superior Performance⁷**
Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mold and mildew.
- High Recycled Content**
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Grid Profile Options

A	B	C	D	E	F	G	H	I	J
DX®/DXL™	DXW™	CENTRICITEE™ DXT	DX/DXL	CENTRICITEE DXT	IDENTITEE™ DXI™	FINELINE® DXF	FINELINE® 1/8 DXFF	CENTRICITEE DXT	IDENTITEE™ DXI™

Physical Data/ Footnotes

<p>Product literature Data sheet: SC2180</p> <p>ASTM E1264 classification Type III, Form 2, Pattern CE</p> <p>ASTM E84 surface burning characteristics Class A Flame spread: 25 Smoke developed: 50</p>	<p>Weight .78-1.03 lb./sq. ft.</p> <p>Thermal resistance R-1.4 (5/8" panels) R-1.7 (3/4" panels)</p> <p>Maximum backloading See Warranty for details.</p> <p>Maintenance Can be cleaned easily with a soft brush or vacuum.</p>	<p>Footnotes</p> <ol style="list-style-type: none"> 1. Applies when USG acoustical ceilings recycling program is utilized. 2. For details, see LEED report generator at usgdesignstudio.com. 3. LR values are shown as averages. 4. Panels have 15/16" routing. 5. Panels have 9/16" routing. 6. Mixing .50 and .60 NRC panels in the same ceiling plane is not recommended. 	<p>7. Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see <i>Ceiling Systems Warranties and Limitations (SC2102)</i> and <i>CLIMAPlus Ceilings Certification of Performance (SC2451)</i>.</p> <p>8. No formaldehyde is added to any ingredient or during the manufacturing process for all mineral fiber acoustical ceiling products manufactured by USG Interiors, Inc.</p>
--	---	--	--



Manufactured by USG Interiors, Inc.
550 West Adams Street
Chicago, IL 60661

The following are trademarks of USG Interiors, Inc. or a related company: CENTRICITEE, CLIMAPlus, DONN, DX, DXF, DXL, DXW, FINELINE, IDENTITEE, OLYMPIA MICRO, USG.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

SC2180/rev. 10-11
© 2011, USG Interiors, Inc.
Printed in U.S.A.